



Leanwrap™

Less Waste, Safer Loads!

Patented and patent pending innovations that overcome today's stretch wrapping challenges!



SL Automatic

Stretch Wrapping Systems

Loads are Harder to Wrap Than Ever!

Today's stretch wrapping challenges have spawned an epidemic of fragile and demanding loads that are harder than ever to wrap. Yesterday's technology doesn't give you the tools to know if your loads are safe to ship.

So we reinvented stretch wrapping.

Our exclusive, patented LeanWrap features give you what you need to manage the performance of your loads and overcome today's stretch wrapping challenges.

Stop breaking stretch film. Stop twisting loads. Stop loads from sliding off the pallets. Stop destructive film tails. Stop guessing if your loads are safe to ship.

Take control of your stretch wrapping.

LeanWrap technology gets you less waste and safer loads.

The right containment force applied consistently is the key to stretch wrapping success.



Good Loads

- Containment force is at or above the minimum requirement everywhere on the load.
- The load is bonded to the pallet with 3-5 inches of film rolled into a cable.
- Looks good. No long or dragging film tails.

"Good loads are safe to ship."


Lantech®

SL Automatic

Exclusive LeanWrap Innovations


Metered Film Delivery System

No load twisting
No load crushing
No film breaks

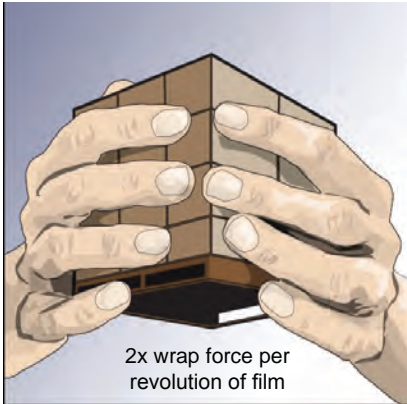

Load Seeking Clamp 4.0


No loose or dragging film tails

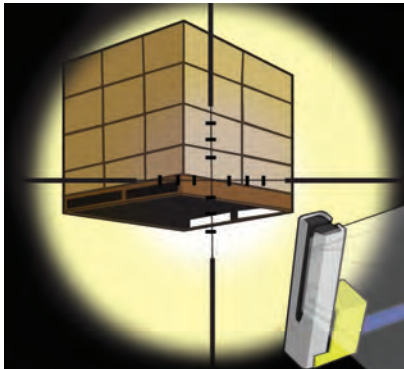

Eliminates a major source of film breaks. Maintains containment force at the bottom of the load.

Pallet Grip®

Stop loads from sliding off the pallet

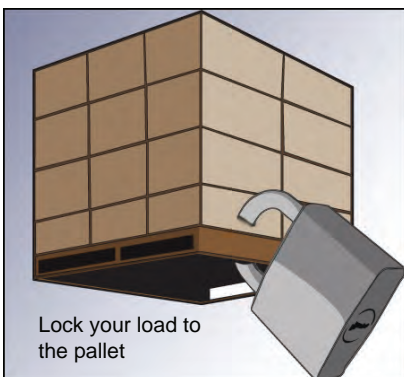

Machine Generated Performance Data

Built in process controls to provide detailed wrap and production data. Know your containment force on every load, every day. Plus a host of other key stretch wrapping metrics.



Stop Guessing!

Knowledge is power!



Specifications

PERFORMANCE CRITERIA

Production Speed 20-90 loads per hour based on load height

Maximum Load Size 58"L x 58"W x 80"H

Minimum Load Size 36"L x 36"W x 24"H

Maximum Load Weight Conveyor Capacity

LOAD HANDLING SYSTEM

Rotation Drive TEFC AC Motor

Rotation Speed 1-40 RPM controlled by VFD (depending on machine model)

FILM DELIVERY SYSTEM

Film Capacity 20" web with 10" diameter

Film Cut and Clamp Load Seeking Clamp™ impulse hot wire cut

Pallet Grip Standard

CONTAINMENT FORCE TOOL

CFT-5 with Film Scale and Holder

ELECTRICAL DATA

Enclosure NEMA 12, UL

Power 460VAC/3/60Hz

10K SCCR w/breakers

Control PLC with Ethernet Communication

HMI Touchscreen

Wiring Pre-wired with quick connect cables

PNEUMATIC DATA

All Requirements 3-5 CFM at 60-80 PSI


SHIPPING WEIGHT

Machine Only 4,300 lbs.


SERVICE SUPPORT

Warranty 3 years unlimited cycles

Technical Support 24 hrs/7 days a week

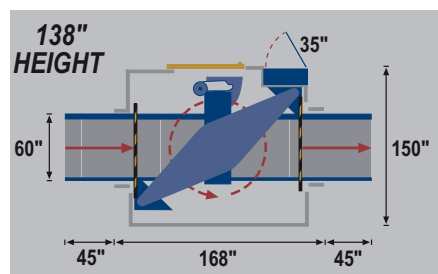

SL Automatic - 2 Legs

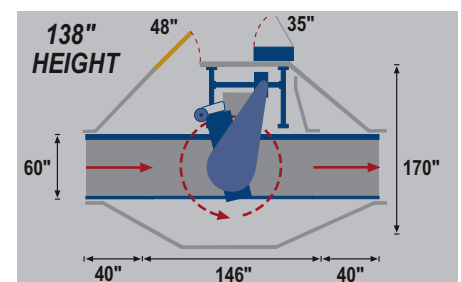

SL Automatic - 1 Leg



Specifications subject to change without notice. Lantech systems and sub-systems are protected by U.S. and foreign patents. Additional U.S. and foreign patents pending. © Lantech.com 2012